

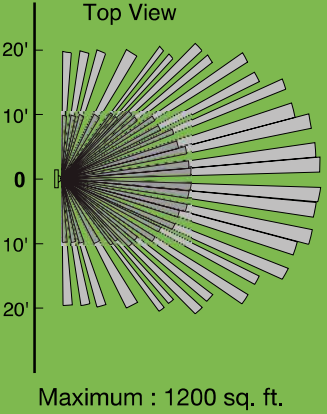
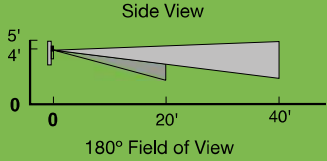


Coverage Area

**IOS-DOV
IOS-DSR
IOS-DDR**

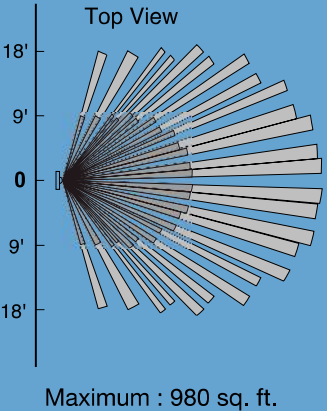

**IOS-DSIF
IOS-DSIMF
IOS-DPBIF2
IOS-DPBIF
IOS-DPBIMF**

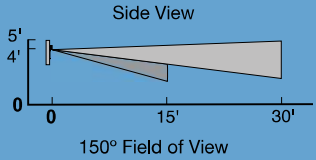

Intermatic Inc.,
7777 Winn Road
Spring Grove, Illinois 60081



©2011 Intermatic Inc., 7777 Winn Road, Spring Grove, IL 60081 www.intermatic.com 3000V00017



*Lighting Controls for Commercial
and Residential Applications*



Shine New Light on Energy Savings


Occupancy / Vacancy sensors



Intermatic covers a spectrum of Occupancy and Vacancy sensor models, which can monitor virtually any area within a building. All models incorporate “Passive Infrared Technology” that monitors a specific area for heat generated naturally by people. When heat is detected, the lighting will automatically turn ON, then OFF when the presence is no longer detected. These sensors are simple to install as many do not require a neutral wire. There are models to control both electronic and magnetic ballasts and all meet California Title 24 requirements.

All Intermatic sensors feature:

- Passive Infrared Technology
- Adjustable sensitivity settings
- Time delay OFF ranging from 15 seconds to 30 minutes
- Standard Decorator wall plate included
- Meet California Title 24 requirements
- UL/cUL listing

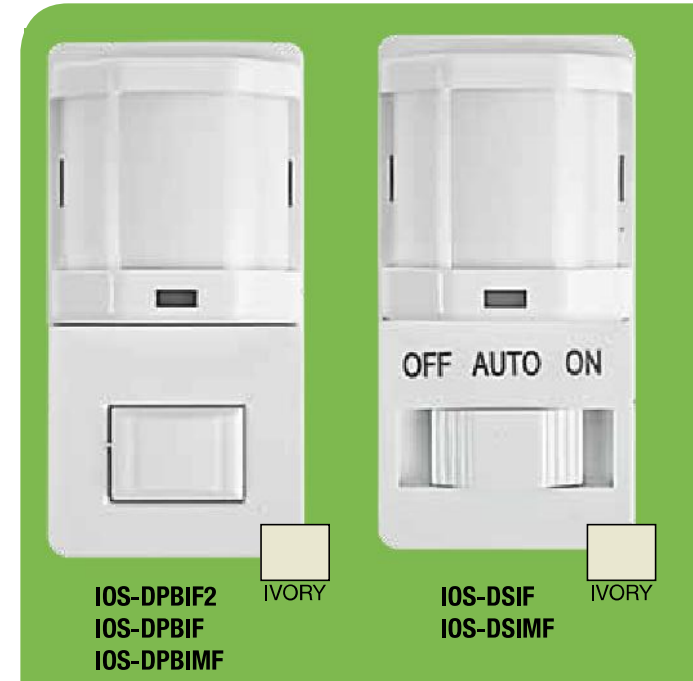

Model Number	Tungsten	Fluorescent	Motor	Ballast Compatibility	Coverage Area	Warranty	Neutral Wire Required	Ambient Light Level	Walk-through	Zero Crossing Function	Self Adaptive
IOS-DDR	800W, 120VAC	800VA, 120VAC 1600VA, 277VAC	1/4 HP	All	180° 1200 Sq. Ft.	5 yr.				✓	
IOS-DSR	800W, 120VAC	800VA, 120VAC 1600VA, 277VAC	1/4 HP	All	180° 1200 Sq. Ft.	5 yr.			✓	✓	✓
IOS-DOV	800W, 120VAC	800VA, 120VAC	1/4 HP	All	180° 1200 Sq. Ft.	5 yr.	✓	✓		✓	
IOS-DPBIF2	500W, 120VAC	500VA, 120VAC	1/8 HP	All	150° 980 Sq. Ft.	5 yr.	✓				
IOS-DSIF	500W, 120VAC	500VA, 120VAC	1/8 HP	All	150° 980 Sq. Ft.	2 yr.	✓	✓			
IOS-DPBIF	500W, 120VAC	500VA, 120VAC	1/8 HP	All	150° 980 Sq. Ft.	2 yr.	✓	✓			
IOS-DSIMF	500W, 120VAC	500VA, 120VAC	1/8 HP	Magnetic ONLY	150° 980 Sq. Ft.	2 yr.		✓			
IOS-DPBIMF	500W, 120VAC	500VA, 120VAC	1/8 HP	Magnetic ONLY	150° 980 Sq. Ft.	2 yr.		✓			